


Haakse inlasflens socket-weld - duimse maten

Type: AFWL / AFWT

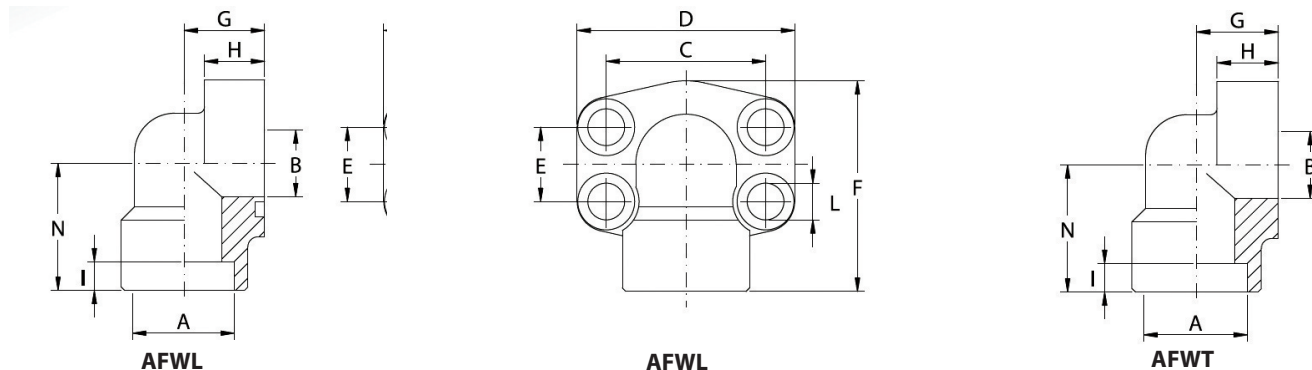

Serie 3000

Diam.	PN bar	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	L mm	N mm	Metrisch bouten	Ref. flens met o-ringgroef	Ref. tegenflens zonder o-ringgroef
1/2"	345	21,6	13	38,10	54	17,48	60	20	16	10	9	37	M8x30	AFWL308021	AFWT308021
1/2"	345	17,5	13	38,10	54	17,48	60	20	16	10	9	37	M10x35	AFWL308017	AFWT308017
3/4"	345	37,2	19	47,63	65	22,23	63	24	18	10	11	38	M10x35	AFWL312027	AFWT312027
1"	345	34,0	25	52,37	70	26,19	70	28	19	12	11	43	M10x40	AFWL316034	AFWT316034
1.1/4"	280	42,8	32	58,72	79	30,18	85	34	21	14	11,5	51	M12x45	AFWL320042	AFWT320042
1.1/2"	210	48,6	38	69,85	93	35,71	95	38	25	16	13,5	56	M12x45	AFWL324048	AFWT324048
2"	210	61,0	51	77,77	110	42,88	110	42	25	18	13,5	65	M12x45	AFWL332061	AFWT332061

Referentie rvs uitvoering: R + Ref.

Serie 6000

Diam.	PN bar	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	L mm	N mm	Metrisch bouten	Ref. flens met o-ringgroef	Ref. tegenflens zonder o-ringgroef
1/2"	420	21,6	13	40,49	54	18,24	60	20	16	10	9	37	M8x30	AFWL608021	AFWT608021
1/2"	420	17,5	13	40,49	54	18,24	60	20	16	10	9	37	M8x30	AFWL608017	AFWT608017
3/4"	420	37,2	19	50,80	70	23,80	70	28	19	12	11	43	M10x40	AFWL612027	AFWT612027
1"	420	34,0	25	57,15	79	27,76	85	34	21	14	13	51	M12x45	AFWL616034	AFWT616034
1.1/4"	420	42,8	32	66,68	93	31,75	95	38	25	16	15	56	M14x45	AFWL620042	AFWT620042
1.1/2"	420	48,6	38	79,38	110	36,50	110	42	25	18	17	65	M16x50	AFWL624048	AFWT624048
2"	420	61,0	51	96,82	134	44,45	132	45	35	25	21	75	M20x70	AFWL632061	AFWT632061

Referentie rvs uitvoering: R + Ref.

Standaard zijn de tegenflenzen voorzien van getapte metrische gaten. Op aanvraag kunnen deze ook voorzien worden van UNF getapte gaten.