
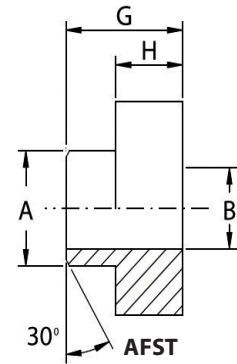
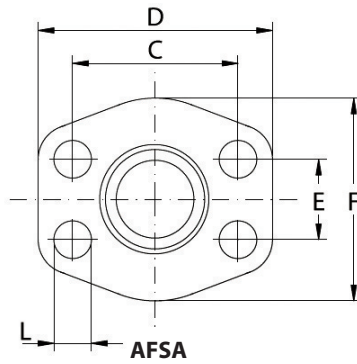


Aanlasflens butt-weld / schedule 160

Type: AFSAS / AFSTS

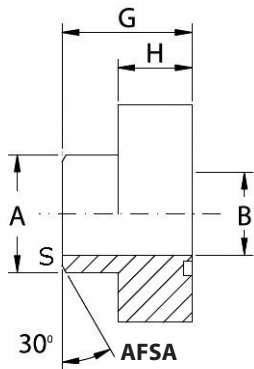

Serie 3000

Diam.	PN bar	A mm	B mm	S mm	C mm	D mm	E mm	F mm	G mm	H mm	L mm	Metrisch bouten	Ref. flens met o-ringgroef	Ref. tegenflens zonder o-ringgroef
1/2"	345	21,5	11,8	4,85	38,10	57	17,48	46	36	16	9	M8x30	AFSA3080215049	AFST3080215049
3/4"	345	28,0	15,6	6,20	47,63	65	22,23	50	36	18	11	M10x35	AFSA3120280062	AFST3120280062
1"	345	34,0	20,7	6,65	52,37	70	26,19	55	38	18	11	M10x35	AFSA3160340067	AFST3160340067
1.1/4"	276	42,8	29,5	6,65	58,72	79	30,18	68	41	21	11,5	M10x40	AFSA3200428067	AFST3200428067
1.1/2"	210	48,6	34	7,30	69,85	93	35,71	78	44	25	13,5	M12x45	AFSA3240486073	AFST3240486073
2"	210	61,0	42,8	9,10	77,77	102	42,88	90	45	25	13,5	M12x45	AFSA3320610091	AFST3320610091
2.1/2"	175	77,0	54	11,50	88,90	114	50,80	105	50	25	13,5	M12x45	AFSA3400770110	AFST3400770110
3"	140	92,0	67,7	12,15	106,38	134	61,93	124	50	27	17,5	M16x50	AFSA3480920120	AFST3480920120
4"	140	115,5	87,3	14,10	130,18	162	77,77	146	48	27	17,5	M16x50	AFSA3641150140	AFST3641150140
5"	140	142,0	109,5	16,25	152,40	184	92,08	180	50	28	17,5	M16x50	AFSA3801420160	AFST3801420160

Referentie rvs uitvoering: R + Ref.

Serie 6000

Diam.	PN bar	A mm	B mm	S mm	C mm	D mm	E mm	F mm	G mm	H mm	L mm	Metrisch bouten	Ref. flens met o-ringgroef	Ref. tegenflens zonder o-ringgroef
1/2"	420	21,5	11,8	4,85	40,49	57	18,24	46	36	16	9	M8x30	AFSA6080215049	AFST6080215049
3/4"	420	28,0	15,6	6,20	50,80	71	23,80	55	35	21	11	M10x40	AFSA6120280062	AFST6120280062
1"	420	34,0	20,7	6,65	57,15	79	27,76	68	41	21	13	M12x45	AFSA6160340067	AFST6160340067
1.1/4"	420	42,8	29,5	6,65	66,68	93	31,75	78	44	25	15	M14x45	AFSA6200428067	AFST6200428067
1.1/2"	420	48,6	34	7,30	79,38	112	36,50	94	50	28	17	M16x50	AFSA6240486073	AFST6240486073
2"	420	61,0	42,8	9,10	96,82	134	44,45	114	65	37	21	M20x70	AFSA6320610091	AFST6320610091
2.1/2"	350	76,6	54	11,30	123,80	180	58,70	152	80	45	26	M24x80	AFSA6407600113	AFST6407600113
3"	350	90,0	67,7	11,15	152,40	208	71,40	178	90	55	33	M30x100	AFSA6480900112	AFST6480900112

Referentie rvs uitvoering: R + Ref.

Standaard zijn de tegenflenzen voorzien van getapte metrische gaten. Op aanvraag kunnen deze ook voorzien worden van UNF getapte gaten.