
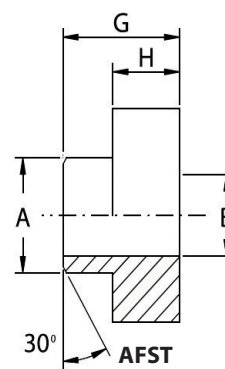
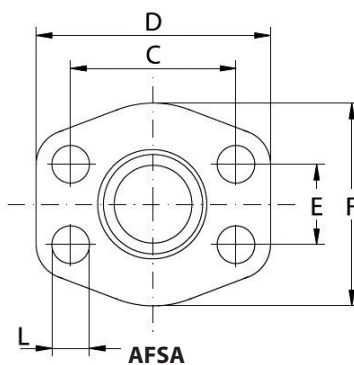


Aanlasflens butt-weld / schedule XXS

Type: AFSA / AFST

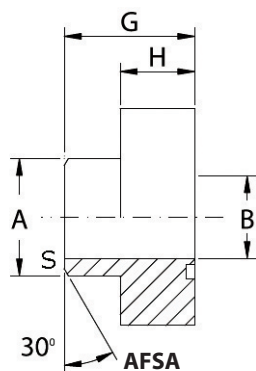

Serie 3000

Diam.	PN bar	A mm	B mm	S mm	C mm	D mm	E mm	F mm	G mm	H mm	L mm	Metrisch bouten	Ref. flens met o-ringgroef	Ref. tegenflens zonder o-ringgroef
1/2"	345	21,5	6,3	7,60	38,10	57	17,48	46	36	16	9	M8x30	AFSA3080215076	AFST3080215076
3/4"	345	28,0	11,0	8,50	47,63	65	22,23	50	36	18	11	M10x35	AFSA3120280085	AFST3120280085
1"	345	34,0	15,2	9,40	52,37	70	26,19	55	38	18	11	M10x35	AFSA3160340094	AFST3160340094
1.1/4"	280	42,8	22,8	10,0	58,72	79	30,18	68	41	21	11,5	M10x40	AFSA3200428100	AFST3200428100
1.1/2"	210	48,6	28,0	10,3	69,85	93	35,71	78	44	25	13,5	M12x45	AFSA3240486103	AFST3240486103
2"	210	61,0	38,2	11,4	77,77	102	42,88	90	45	25	13,5	M12x45	AFSA3320610114	AFST3320610114
2.1/2"	175	77,0	45,0	16,0	88,90	114	50,80	105	50	25	13,5	M12x45	AFSA3400770160	AFST3400770160
3"	140	92,0	58,4	16,8	106,38	134	61,93	124	50	27	17,5	M16x50	AFSA3480920168	AFST3480920168
4"	140	115,5	80,0	17,8	130,18	162	77,77	146	48	27	17,5	M16x50	AFSA3641155178	AFST3641155178
5"	140	142,0	102,9	19,5	152,40	184	92,08	180	50	28	17,5	M16x50	AFSA3801420195	AFST3801420195

Referentie rvs uitvoering: R + Ref.

Serie 6000

Diam.	PN bar	A mm	B mm	S mm	C mm	D mm	E mm	F mm	G mm	H mm	L mm	Metrisch bouten	Ref. flens met o-ringgroef	Ref. tegenflens zonder o-ringgroef
1/2"	420	21,5	6,3	7,60	40,49	57	18,24	46	36	16	9	M8x30	AFSA6080215076XXS	AFST6080215076XXS
3/4"	420	28,0	11,0	8,50	50,80	71	23,80	55	35	21	11	M10x40	AFSA6120280085XXS	AFST6120280085XXS
1"	420	34,0	15,2	9,40	57,15	79	27,76	68	41	21	13	M12x45	AFSA6160340094XXS	AFST6160340094XXS
1.1/4"	420	42,8	22,8	10,0	66,68	93	31,75	78	44	25	15	M14x45	AFSA6200428100XXS	AFST6200428100XXS
1.1/2"	420	48,6	28,0	10,3	79,38	112	36,50	94	50	28	17	M16x50	AFSA6240486103XXS	AFST6240486103XXS
2"	420	61,0	38,2	11,4	96,82	134	44,45	114	65	37	21	M20x70	AFSA6320610114XXS	AFST6320610114XXS
2.1/2"	420	76,6	54,0	11,3	123,80	180	58,70	152	80	45	26	M24x80	AFSA6407600168XXS	AFST6407600168XXS
3"	420	90,0	58,4	15,8	152,40	208	71,40	178	90	55	33	M30x100	AFSA6480900158XXS	AFST6480900158XXS

Referentie rvs uitvoering: R + Ref.

Standaard zijn de tegenflenzen voorzien van getapte metrische gaten. Op aanvraag kunnen deze ook voorzien worden van UNF getapte gaten.