


NPT aansluiting

K2AGN

Aansluiting	: Buitendraad
Schroefdraad	: NPT
Afdichting	: 60° conus
Uitvoering	: Recht
Norm	: SAE J516

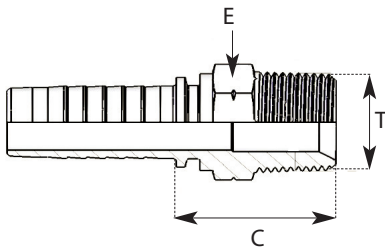


DN	Inch	T draad	C mm	E mm	Referentie
5	3/16"	1/8"-27	22	12	K2AGN0502
5	3/16"	1/4"-18	27	15	K2AGN0504
6	1/4"	1/8"-27	22	12	K2AGN0602
6	1/4"	1/4"-18	28	15	K2AGN06
6	1/4"	3/8"-18	28	19	K2AGN0606
8	5/16"	1/4"-18	28	15	K2AGN0804
8	5/16"	3/8"-18	28	19	K2AGN08
8	5/16"	1/2"-14	34	22	K2AGN0808
10	3/8"	1/4"-18	28	15	K2AGN1004
10	3/8"	3/8"-18	28	19	K2AGN10
10	3/8"	1/2"-14	34	22	K2AGN1008
12	1/2"	3/8"-18	29	19	K2AGN1206
12	1/2"	1/2"-14	35	22	K2AGN12
12	1/2"	3/4"-14	36	27	K2AGN1212
16	5/8"	1/2"-14	35	24	K2AGN1608
16	5/8"	3/4"-14	36	27	K2AGN1612
20	3/4"	1/2"-14	36	24	K2AGN2008
20	3/4"	3/4"-14	37	27	K2AGN20
20	3/4"	1"-11.1/2	43	36	K2AGN2016
25	1"	1"-11.1/2	44	36	K2AGN25
25	1"	1.1/4"-11.1/2	46	46	K2AGN2520
32	1.1/4"	1"-11.1/2	45	41	K2AGN3216
32	1.1/4"	1.1/4"-11.1/2	47	46	K2AGN32
38	1.1/2"	1.1/2"-11.1/2	49	50	K2AGN38
50	2"	2"-11.1/2	55	65	K2AGN50

Referentie rvs uitvoering: vervang K door R

K2NPS

Aansluiting	: Binnendraad met losse moer
Schroefdraad	: NPT
Afdichting	: 60° conus
Uitvoering	: Recht

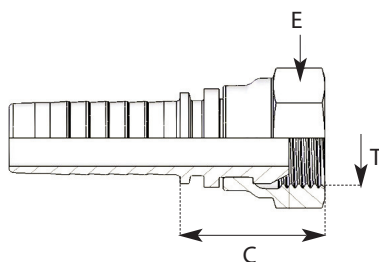

DN	Inch	T draad	C mm	E mm	Referentie
5	3/16"	1/4"-18	17	19	K2NPS0504
6	1/4"	1/4"-18	17	19	K2NPS06
10	3/8"	3/8"-18	19	22	K2NPS10
12	1/2"	1/2"-14	23	27	K2NPS12

Referentie rvs uitvoering: vervang K door R