


## BSP aansluiting met o-ring

## K8DRO

Aansluiting	: Binnendraad met losse moer
Schroefdraad	: BSP
Afdichting	: 60° conus (voorzien van o-ring)
Uitvoering	: Recht

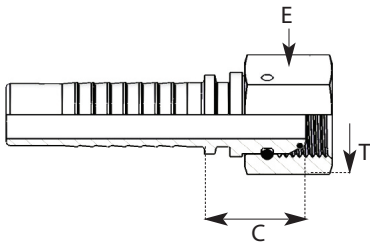


DN	Inch	T draad	C mm	E mm	Referentie
20	3/4"	3/4"-14	23	32	K8DRO20
20	3/4"	1"-11	25	38	K8DRO2016
25	1"	1"-11	26	38	K8DRO25
32	1.1/4"	1.1/4"-11	29	50	K8DRO32
32	1.1/4"	1.1/2"-11	31	55	K8DRO3224
38	1.1/2"	1.1/2"-11	31	55	K8DRO38
50	2"	2"-11	30	70	K8DRO50

Referentie rvs uitvoering: vervang K door R

## K84DRO

Aansluiting	: Binnendraad met losse moer
Schroefdraad	: BSP
Afdichting	: 60° conus (voorzien van o-ring)
Uitvoering	: 45° gebogen - monobloc

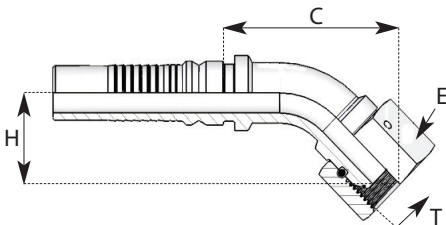


DN	Inch	T draad	C mm	E mm	H mm	Referentie
20	3/4"	3/4"-14	84	32	28	K84DRO20
25	1"	1"-11	112	38	38	K84DRO26
32	1.1/4"	1.1/4"-11	137	50	41	K84DRO32
38	1.1/2"	1.1/2"-11	166	55	54	K84DRO38
50	2"	2"-11	195	70	70	K84DRO50

Referentie rvs uitvoering: vervang K door R

## K89DRO

Aansluiting	: Binnendraad met losse moer
Schroefdraad	: BSP
Afdichting	: 60° conus (voorzien van o-ring)
Uitvoering	: 90° gebogen - monobloc

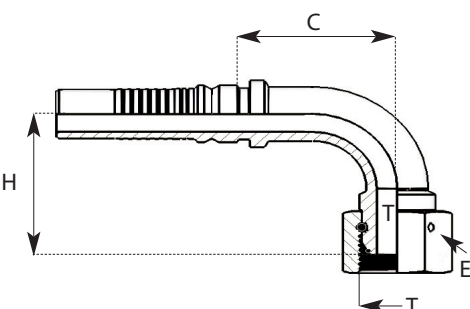


DN	Inch	T draad	C mm	E mm	H mm	Referentie
20	3/4"	3/4"-14	54	32	56	K89DRO20
25	1"	1"-11	73	38	70	K89DRO25
25	1"	1.1/4"-11	73	50	76	K89DRO2520
32	1.1/4"	1.1/4"-11	93	50	83	K89DRO32
38	1.1/2"	1.1/2"-11	111	55	104	K89DRO38
50	2"	2"-11	122	70	135	K89DRO50

Referentie rvs uitvoering: vervang K door R

## BSP aansluiting

## K8AGR

Aansluiting	: Buitendraad
Schroefdraad	: BSP
Afdichting	: 60° conus
Uitvoering	: Recht

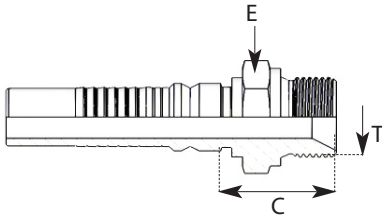

DN	Inch	T draad	C mm	E mm	Referentie
20	3/4"	3/4"-14	33	32	K8AGR20
20	3/4"	1"-11	36	41	K8AGR2016
25	1"	1"-11	37	41	K8AGR25
25	1"	1.1/4"-11	41	50	K8AGR2520
32	1.1/4"	1.1/4"-11	42	50	K8AGR32
38	1.1/2"	1.1/2"-11	44	55	K8AGR38
50	2"	2"-11	53	70	K8AGR50

Referentie rvs uitvoering: vervang K door R