


Flensaansluiting 3000 psi

K8SFL

Aansluiting	: Flens met dichtingsgroef
Serie	: 3000 psi (SAE J516/J518)
Afdichting	: O-ring of specifieke afdichtingsring (deel 13 - pg. 13)
Uitvoering	: Recht

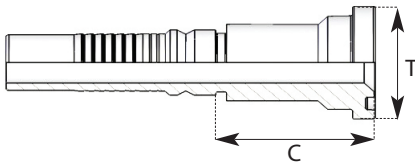


DN	Inch	flens	T mm	C mm	Referentie
20	3/4"	3/4"	38,1	47	K8SFL20
20	3/4"	1"	44,5	50	K8SFL2016
25	1"	1"	44,5	52	K8SFL25
25	1"	1.1/4"	50,8	55	K8SFL2520
32	1.1/4"	1.1/4"	50,8	56	K8SFL3220
32	1.1/4"	1.1/2"	60,3	59	K8SFL3224
38	1.1/2"	1.1/2"	60,3	60	K8SFL3824
38	1.1/2"	2"	71,4	65	K8SFL3832
50	2"	2"	71,4	67	K8SFL50

Referentie rvs uitvoering: vervang K door R

K84SFL

Aansluiting	: Flens met dichtingsgroef
Serie	: 3000 psi (SAE J516/J518)
Afdichting	: O-ring of specifieke afdichtingsring (deel 13 - pg. 13)
Uitvoering	: 45° gebogen - monobloc

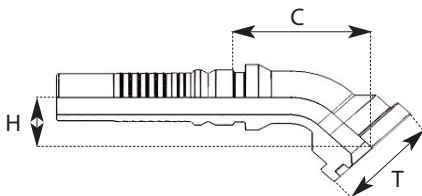


DN	Inch	flens	T mm	C mm	H mm	Referentie
20	3/4"	3/4"	38,1	81	25	K84SFL20
20	3/4"	1"	44,5	86	28	K84SFL2016
25	1"	1"	44,5	107	35	K84SFL25
25	1"	1.1/4"	50,8	113	37	K84SFL2520
32	1.1/4"	1.1/4"	50,8	136	37	K84SFL3220
32	1.1/4"	1.1/2"	60,3	136	40	K84SFL3224
38	1.1/2"	1.1/2"	60,3	159	44	K84SFL38
38	1.1/2"	2"	71,4	159	47	K84SFL3832
50	2"	2"	71,4	182	56	K84SFL50

Referentie rvs uitvoering: vervang K door R

K89SFL

Aansluiting	: Flens met dichtingsgroef
Serie	: 3000 psi (SAE J516/J518)
Afdichting	: O-ring of specifieke afdichtingsring (deel 13 - pg. 13)
Uitvoering	: 90° gebogen - monobloc

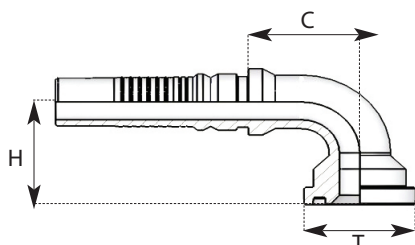


DN	Inch	flens	T mm	C mm	H mm	Referentie
20	3/4"	3/4"	38,1	52	52	K89SFL20
20	3/4"	1"	44,5	55	56	K89SFL2016
25	1"	1"	44,5	73	65	K89SFL25
25	1"	1.1/4"	50,8	69	75	K89SFL2520
32	1.1/4"	1.1/4"	50,8	96	76	K89SFL32
32	1.1/4"	1.1/2"	60,3	98	79	K89SFL3224
38	1.1/2"	1.1/2"	60,3	100	95	K89SFL38
38	1.1/2"	2"	71,4	134	101	K89SFL3832
50	2"	2"	71,4	122	121	K89SFL50

Referentie rvs uitvoering: vervang K door R

Flensaansluiting 6000 psi

K8SFS

Aansluiting	: Flens met dichtingsgroef
Serie	: 6000 psi (SAE J516/J518)
Afdichting	: O-ring of specifieke afdichtingsring (deel 13 - pg. 13)
Uitvoering	: Recht

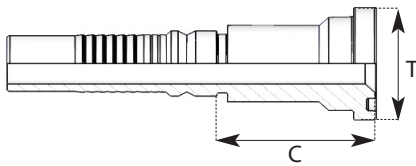


DN	Inch	Flens	T mm	C mm	Referentie
20	3/4"	3/4"	41,3	51	K8SFS20
20	3/4"	1"	47,6	57	K8SFS2016
25	1"	3/4"	41,3	52	K8SFS2512
25	1"	1"	47,6	59	K8SFS25
25	1"	1.1/4"	54,0	66	K8SFS2520
32	1.1/4"	1"	47,6	60	K8SFS3216
32	1.1/4"	1.1/4"	54,0	67	K8SFS32
32	1.1/4"	1.1/2"	63,5	73	K8SFS3224
38	1.1/2"	1.1/4"	54,0	75	K8SFS3820
38	1.1/2"	1.1/2"	63,5	74	K8SFS38
38	1.1/2"	2"	79,4	82	K8SFS3832
50	2"	2"	79,4	84	K8SFS50

Referentie rvs uitvoering: vervang K door R

K84SFS

Aansluiting	: Flens met dichtingsgroef
Serie	: 6000 psi (SAE J516/J518)
Afdichting	: O-ring of specifieke afdichtingsring (deel 13 - pg. 13)
Uitvoering	: 45° gebogen - monobloc

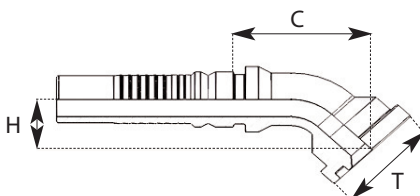


DN	Inch	flens	T mm	C mm	H mm	Referentie
20	3/4"	3/4"	41,3	85	30	K84SFS20
20	3/4"	1"	47,6	88	34	K84SFS2016
25	1"	3/4"	41,3	107	33	K84SFS2512
25	1"	1"	47,6	112	34	K84SFS25
25	1"	1.1/4"	54,0	117	40	K84SFS2520
32	1.1/4"	1"	47,6	117	42	K84SFS3216
32	1.1/4"	1.1/4"	54,0	139	43	K84SFS3220
32	1.1/4"	1.1/2"	63,5	144	48	K84SFS3224
38	1.1/2"	1.1/2"	63,5	167	50	K84SFS38
38	1.1/2"	2"	79,4	176	60	K84SFS3832
50	2"	2"	79,4	200	67	K84SFS50

Referentie rvs uitvoering: vervang K door R

K89SFS

Aansluiting	: Flens met dichtingsgroef
Serie	: 6000 psi (SAE J516/J518)
Afdichting	: O-ring of specifieke afdichtingsring (deel 13 - pg. 13)
Uitvoering	: 90° gebogen - monobloc

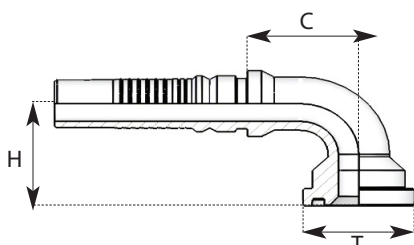


DN	Inch	flens	T mm	C mm	H mm	Referentie
20	3/4"	3/4"	41,3	53	57	K89SFS20
20	3/4"	1"	47,6	52	63	K89SFS2016
25	1"	3/4"	41,3	73	66	K89SFS2512
25	1"	1"	47,6	74	72	K89SFS25
25	1"	1.1/4"	54,0	73	79,5	K89SFS2520
32	1.1/4"	1"	47,6	88	75	K89SFS3216
32	1.1/4"	1.1/4"	54,0	96	84	K89SFS32
32	1.1/4"	1.1/2"	63,5	98	90	K89SFS3224
38	1.1/2"	1.1/2"	63,5	114	101	K89SFS38
38	1.1/2"	2"	79,4	115	113	K89SFS3832
50	2"	2"	79,4	124	138	K89SFS50

Referentie rvs uitvoering: vervang K door R

SUPERCAT aansluiting

K8CAT

Aansluiting	: Flens met dichtingsgroef
Afdichting	: O-ring of specifieke afdichtingsring (deel 13 - pg. 14)
Uitvoering	: Recht

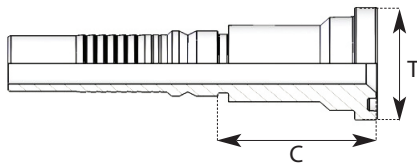


DN	Inch	flens	T mm	C mm	Referentie
20	3/4"	3/4"	41,3	55	K8CAT20
20	3/4"	1"	47,6	62	K8CAT2016
25	1"	1"	47,6	63	K8CAT25
25	1"	1.1/4"	54,0	70	K8CAT2520
32	1.1/4"	1.1/4"	54,0	71	K8CAT32
38	1.1/2"	1.1/2"	64,0	78	K8CAT38

Referentie rvs uitvoering: vervang K door R

K84CAT

Aansluiting	: Flens met dichtingsgroef
Afdichting	: O-ring of specifieke afdichtingsring (deel 13 - pg. 14)
Uitvoering	: 45° gebogen - monobloc

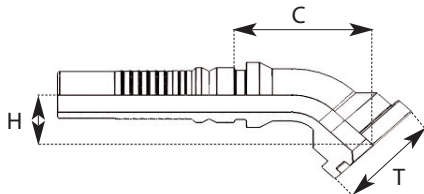


DN	Inch	flens	T mm	C mm	H mm	Referentie
20	3/4"	3/4"	41,3	89	30	K84CAT20
25	1"	1"	47,6	115	38	K84CAT25
32	1.1/4"	1.1/4"	54,0	142	47	K84CAT32
38	1.1/2"	1.1/2"	63,5	169	52	K84CAT38

Referentie rvs uitvoering: vervang K door R

K89CAT

Aansluiting	: Flens met dichtingsgroef
Afdichting	: O-ring of specifieke afdichtingsring (deel 13 - pg. 14)
Uitvoering	: 90° gebogen - monobloc

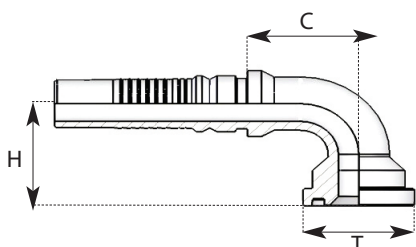

DN	Inch	flens	T mm	C mm	H mm	Referentie
20	3/4"	3/4"	41,3	51	62	K89CAT20
25	1"	1"	47,6	69	79	K89CAT25
25	1"	1.1/4"	54,0	69	80	K89CAT2520
32	1.1/4"	1.1/4"	54,0	94	89	K89CAT32
38	1.1/2"	1.1/2"	63,5	115	100	K89CAT38

Referentie rvs uitvoering: vervang K door R