


Pijpeinde lichte reeks

K2RSL

Aansluiting	: Pijpeinde
Uitvoering	: Rech
Geschikt voor montage van snijringkoppelingen	
Norm	: DIN 2353-L (lichte reeks)

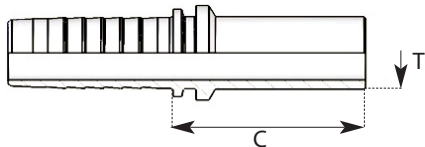


DN	Inch	T pijp (mm)	C mm	Referentie
5	3/16"	6	30	K2RSL0506
5	3/16"	8	29	K2RSL0508
6	1/4"	8	29	K2RSL06
6	1/4"	6	32	K2RSL0606
6	1/4"	10	33	K2RSL0610
8	5/16"	8	31	K2RSL0808
8	5/16"	10	31	K2RSL08
8	5/16"	12	33	K2RSL0812
10	3/8"	8	33	K2RSL1008
10	3/8"	10	33	K2RSL1010
10	3/8"	12	32	K2RSL10
12	1/2"	12	36	K2RSL1212
12	1/2"	15	34	K2RSL12
16	5/8"	18	35	K2RSL16
16	5/8"	22	33	K2RSL1622
20	3/4"	18	37	K2RSL2018
20	3/4"	22	38	K2RSL20
20	3/4"	28	40	K2RSL2028
25	1"	28	41	K2RSL25
32	1.1/4"	35	48	K2RSL32
38	1.1/2"	42	50	K2RSL38

Referentie rvs uitvoering: vervang K door R

K24RSL

Aansluiting	: Pijpeinde
Uitvoering	: 45° gebogen - monobloc
Geschikt voor montage van snijringkoppelingen	
Norm	: DIN 2353-L (lichte reeks)

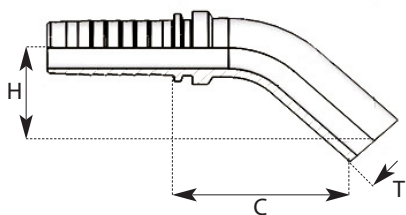


DN	Inch	T pijp (mm)	H mm	C mm	Referentie
5	3/16"	6	26	33	K24RSL0506
5	3/16"	8	26	28	K24RSL0508
6	1/4"	6	24	41	K24RSL0606
6	1/4"	8	25	43	K24RSL06
6	1/4"	10	30	47	K24RSL0610
8	5/16"	10	30	49	K24RSL08
8	5/16"	12	32	53	K24RSL0812
10	3/8"	10	33	50	K24RSL1010
10	3/8"	12	33	52	K24RSL10
10	3/8"	15	38	54	K24RSL1015

Referentie rvs uitvoering: vervang K door R

K29RSL

Aansluiting	: Pijpeinde
Uitvoering	: 90° gebogen - monobloc
Geschikt voor montage van snijringkoppelingen	
Norm	: DIN 2353-L (lichte reeks)

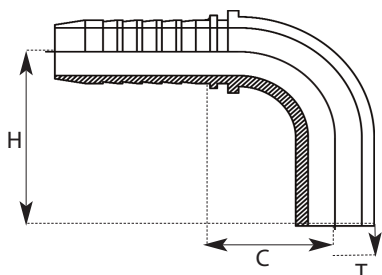


DN	Inch	T pijp (mm)	H mm	C mm	Referentie
6	1/4"	6	32	23	K29RSL0606
6	1/4"	8	34	25	K29RSL06
6	1/4"	10	43	25	K29RSL0610
6	1/4"	12	37	25	K29RSL0612
8	5/16"	10	40	29	K29RSL08
8	5/16"	12	45	29	K29RSL0812
10	3/8"	10	40	27	K29RSL1010
10	3/8"	12	44	30	K29RSL10
10	3/8"	15	41	33	K29RSL1015
12	1/2"	15	56	42	K29RSL12

Referentie rvs uitvoering: vervang K door R

Pijpeinde zware reeks

K2RSS

Aansluiting : Pijpeinde
 Uitvoering : Recht
 Geschikt voor montage van snijringkoppelingen
 Norm : DIN 2353-S (zware reeks)

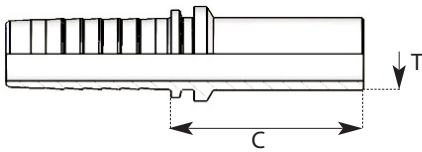


DN	Inch	T pijp (mm)	C mm	Referentie
5	3/16"	6	30	K2RSS0506
5	3/16"	8	29	K2RSS0508
6	1/4"	8	30	K2RSS0608
6	1/4"	10	33	K2RSS06
6	1/4"	12	30	K2RSS0612
8	5/16"	10	31	K2RSS0810
8	5/16"	12	33	K2RSS08
10	3/8"	12	32	K2RSS1012
10	3/8"	14	37	K2RSS10
12	1/2"	12	36	K2RSS1212
12	1/2"	14	39	K2RSS1214
12	1/2"	16	39	K2RSS12
12	1/2"	20	45	K2RSS1220
16	5/8"	20	45	K2RSS16
20	3/4"	20	46	K2RSS2020
20	3/4"	25	49	K2RSS20
25	1"	25	51	K2RSS2525
25	1"	30	54	K2RSS25
25	1"	38	60	K2RSS2538
32	1.1/4"	38	62	K2RSS32

Referentie rvs uitvoering: vervang K door R

K24RSS

Aansluiting : Pijpeinde
 Uitvoering : 45° gebogen - monobloc
 Geschikt voor montage van snijringkoppelingen
 Norm : DIN 2353-S (zware reeks)

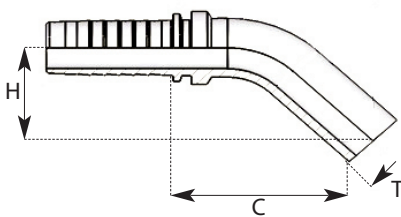


DN	Inch	T pijp (mm)	H mm	C mm	Referentie
5	3/16"	6	26	33	K24RSS0506
5	3/16"	8	26	38	K24RSS0508
6	1/4"	8	25	43	K24RSS0608
6	1/4"	10	30	47	K24RSS06
8	5/16"	12	32	53	K24RSS08
10	3/8"	10	33	50	K24RSS1010
10	3/8"	12	33	52	K24RSS1012
10	3/8"	14	36	53	K24RSS10
12	1/2"	14	39	56	K24RSS1214
12	1/2"	16	40	57	K24RSS12

Referentie rvs uitvoering: vervang K door R

K29RSS

Aansluiting : Pijpeinde
 Uitvoering : 90° gebogen - monobloc
 Geschikt voor montage van snijringkoppelingen
 Norm : DIN 2353-S (zware reeks)

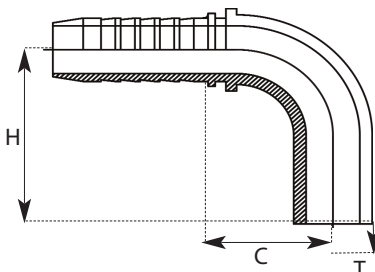

DN	Inch	T pijp (mm)	H mm	C mm	Referentie
6	1/4"	6	32	23	K29RSS0606
6	1/4"	8	34	25	K29RSS0608
6	1/4"	10	43	25	K29RSS06
8	5/16"	10	40	29	K29RSS0810
8	5/16"	12	45	29	K29RSS08
10	3/8"	10	40	27	K29RSS1010
10	3/8"	12	44	30	K29RSS1012
10	3/8"	14	45	33	K29RSS10
12	1/2"	14	52	36	K29RSS1214
12	1/2"	16	59	45	K29RSS12

Referentie rvs uitvoering: vervang K door R