


Verloopkoppeling - 2x losse moer met o-ring

Type: 56DLO

Type: Rechte verloopkoppeling
 Norm: ISO 8434-1 / DIN 2353
 Afdichting door middel van een 24°
 dichtingsconus en een o-ring

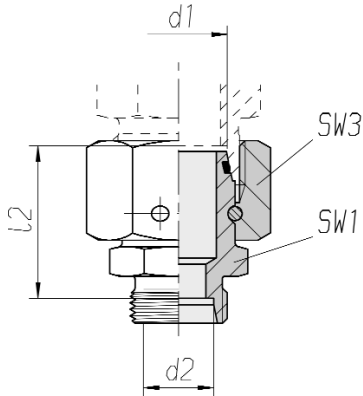

ØD1	PN bar	ØD2	SW1 mm	SW3 mm	L2 mm	Referentie
8L	500	6L	12	17	23,5	56DLO08L06
10L	500	6L	14	19	25	56DLO10L06
10L	500	8L	14	19	25	56DLO10L08
12L	400	6L	17	22	25	56DLO12L06
12L	400	6S	17	22	28	56DLO12S06
12L	400	8L	17	22	25	56DLO12L08
12L	400	10L	17	22	26	56DLO12L10
15L	400	6L	19	27	28	56DLO15L06
15L	400	8L	19	27	28	56DLO15L08
15L	400	10L	19	27	29	56DLO15L10
15L	400	12L	19	27	29	56DLO15L12
18L	400	6L	24	32	28	56DLO18L06
18L	400	8L	24	32	28	56DLO18L08
18L	400	8S	24	32	30	56DLO18S06
18L	400	10L	24	32	29	56DLO18L10
18L	400	12L	24	32	29	56DLO18L12
18L	400	15L	24	32	30	56DLO18L15
22L	250	6L	27	36	32	56DLO22L06
22L	250	10L	27	36	33	56DLO22L10
22L	250	12L	27	36	33	56DLO22L12
22L	250	15L	27	36	34	56DLO22L15
22L	250	18L	27	36	33,5	56DLO22L18
28L	250	8L	32	41	34	56DLO28L08
28L	250	10L	32	41	35	56DLO28L10
28L	250	12L	32	41	35	56DLO28L12
28L	250	15L	32	41	36	56DLO28L15
28L	250	16S	32	41	36,5	56DLO28S16
28L	250	18L	32	41	35,5	56DLO28L18
28L	250	20S	32	41	36,5	56DLO28S20
28L	250	22L	32	50	37,5	56DLO28L22
35L	250	8L	41	50	37	56DLO35L08
35L	250	10L	41	50	38	56DLO35L10
35L	250	12L	41	50	38	56DLO35L12
35L	250	15L	41	50	39	56DLO35L15
35L	250	18L	41	50	38,5	56DLO35L18
35L	250	22L	41	50	40,5	56DLO35L22
35L	250	28L	41	50	40,5	56DLO35L28
42L	250	8L	50	60	40,5	56DLO42L08
42L	250	18L	50	60	42	56DLO42L18
42L	250	22L	50	60	44	56DLO42L22
42L	250	28L	50	60	44	56DLO42L28
42L	250	35L	50	60	43	56DLO42L35


Referentie rvs uitvoering: plaats een 'R' voor de referentie

Rvs uitvoering is voorzien van een Viton® o-ring

Verloopkoppeling - 2x losse moer met o-ring

Type: 56DSO

Type: Rechte verloopkoppeling
 Norm: ISO 8434-1 / DIN 2353
 Afdichting door middel van een 24°
 dichtingsconus en een o-ring

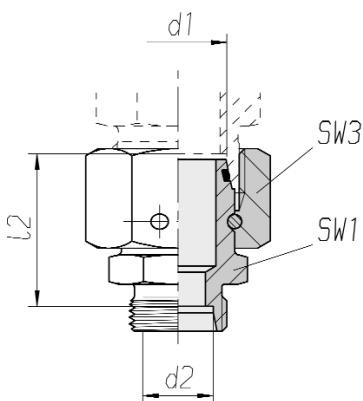

ØD1	PN bar	ØD2	SW1 mm	SW3 mm	L2 mm	Referentie
8S	800	6S	14	19	27	56DSO08S06
10S	800	6S	17	22	27,5	56DSO10S06
10S	800	8S	17	22	27,5	56DSO10S08
12S	630	6S	19	24	30	56DSO12S06
12S	630	8S	19	24	30	56DSO12S08
12S	630	10S	19	24	29,5	56DSO12S10
14S	630	8S	19	27	31,5	56DSO14S08
14S	630	12S	22	27	31	56DSO14S12
16S	630	6S	22	30	32	56DSO16S06
16S	630	8S	22	30	32	56DSO16S08
16S	630	10S	22	30	31,5	56DSO16S10
16S	630	12S	22	30	31,5	56DSO16S12
16S	400	12L	22	30	32	56DSO16L12
16S	630	14S	24	30	31,5	56DSO16S14
20S	420	6S	27	36	36	56DSO20S06
20S	420	8S	27	36	36	56DSO20S08
20S	420	10S	27	36	35,5	56DSO20S10
20S	420	12S	27	36	35,5	56DSO20S12
20S	420	16S	27	36	36,5	56DSO20S16
25S	420	6S	32	36	36	56DSO25S06
25S	420	8S	32	46	36	56DSO25S08
25S	420	10S	32	46	38	56DSO25S10
25S	420	12S	32	46	38	56DSO25S12
25S	420	16S	32	46	39	56DSO25S16
25S	420	20S	32	46	39	56DSO25S20
30S	420	6S	41	46	44	56DSO30S06
30S	420	8S	41	50	44	56DSO30S08
30S	420	10S	41	50	43,5	56DSO30S10
30S	420	12S	41	50	43,5	56DSO30S12
30S	420	16S	41	50	44,5	56DSO30S16
30S	420	20S	41	50	44,5	56DSO30S20
30S	420	25S	41	50	45	56DSO30S25
38S	420	6S	50	60	47,5	56DSO38S06
38S	420	8S	50	60	47,5	56DSO38S08
38S	420	10S	50	60	47	56DSO38S10
38S	420	12S	50	60	47	56DSO38S12
38S	420	16S	50	60	48	56DSO38S16
38S	420	20S	50	60	48	56DSO38S20
38S	420	25S	50	60	48,5	56DSO38S25
38S	420	30S	50	60	49	56DSO38S30

Referentie rvs uitvoering: plaats een 'R' voor de referentie
 Rvs uitvoering is voorzien van een Viton® o-ring