


Flenskoppling - PN315 / Serie 4

Type: FA / KF -4

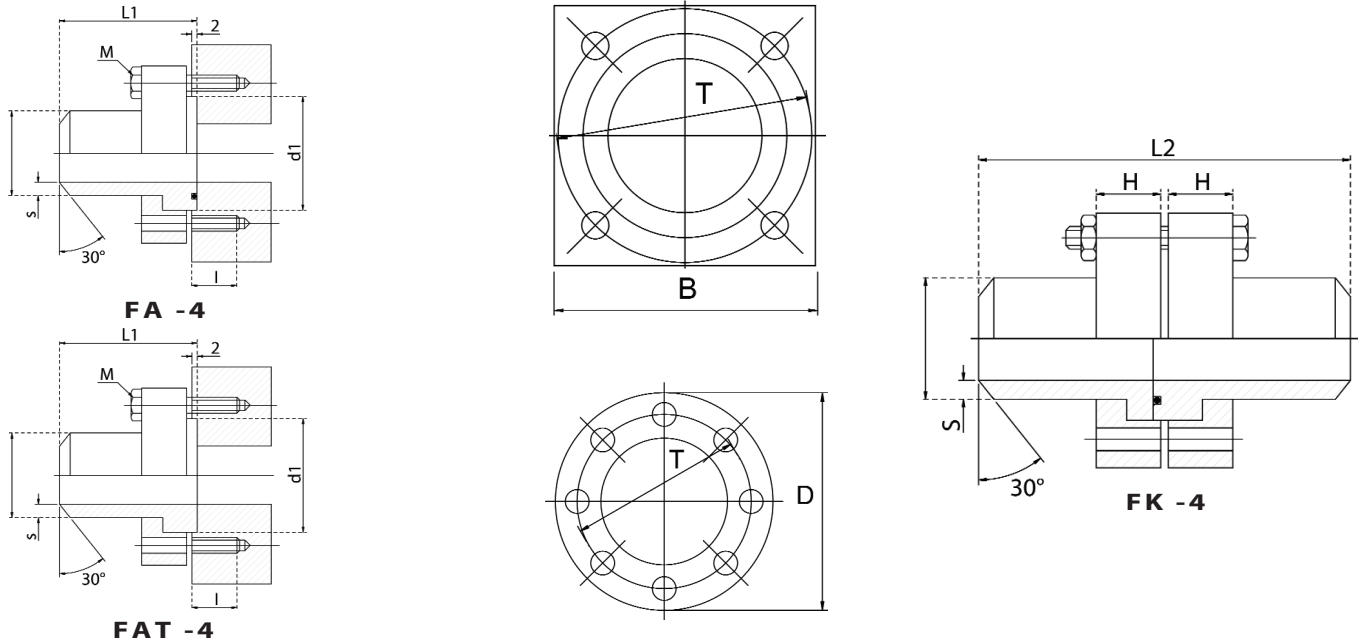

Type: FA -4

DN	B mm	D mm	T mm	d1 mm	L1 mm	L2 mm	H mm	i mm	da mm	s mm	Bouten	O-ring	Referentie
1.1/4"	90	-	80	60	68	130	29	24	48,3	8,0	M16 x 50	38,7 x 3,53	FA4032080
1.1/2"	100	-	98	76	80	153	38	24	60,3	10,0	M16 x 60	53,0 x 5,33	FA4038096
2"	120	-	118	92	98	190	48	25	76,1	12,5	M20 x 70	61,5 x 5,33	FA4050118
2.1/2"	150	-	145	110	109	210	48	30	88,9	14,2	M24 x 75	75,0 x 5,30	FA4065145
3"	180	-	175	135	135	262	58	32	114,3	17,5	M30 x 90	92,5 x 5,33	FA4075175
4"	-	245	200	168	150	292	68	32	139,7	22,2	M24 x 100	115,0 x 7,0	FA4100200
5"	-	300	245	205	190	372	78	32	177,8	30,0	M30 x 110	147,5 x 7,0	FA4125245
6"	-	355	290	245	200	391	85	45	219,1	36,0	M36 x 130	170,0 x 7,0	FA4150290

Referentie rvs uitvoering: R + Ref.

Type: FK -4

DN	B mm	D mm	T mm	d1 mm	L1 mm	L2 mm	H mm	i mm	da mm	s mm	Bouten	O-ring	Referentie
1.1/4"	90	-	80	60	68	130	29	24	48,3	8,0	M16 x 80	38,7 x 3,53	FK4032080
1.1/2"	100	-	98	76	80	153	38	24	60,3	10,0	M16 x 100	53,0 x 5,33	FK4038096
2"	120	-	118	92	98	190	48	25	76,1	12,5	M20 x 120	61,5 x 5,33	FK4050118
2.1/2"	150	-	145	110	109	210	48	30	88,9	14,2	M24 x 130	75,0 x 5,30	FK4065145
3"	180	-	175	135	135	262	58	32	114,3	20,0	M30 x 150	92,5 x 5,33	FK4075175
4"	-	245	200	168	150	292	68	32	152,5	28,0	M24 x 170	115,0 x 7,0	FK4100200
5"	-	300	245	205	190	372	78	32	177,8	30,0	M30 x 200	147,5 x 7,0	FK4125245
6"	-	355	290	245	200	391	85	45	219,1	38,0	M36 x 220	170,0 x 7,0	FK4150290

Referentie rvs uitvoering: R + Ref.