


JIC aansluiting

K8DKJ

Aansluiting	: Binnendraad met losse moer
Schroefdraad	: JIC
Afdichting	: 74° conus
Uitvoering	: Recht

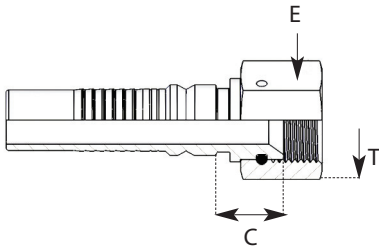


DN	Inch	T draad	C mm	E mm	Refeentie
20	3/4"	1.1/16"-12	19	32	K8DKJ2017
20	3/4"	1.5/16"-12	22	41	K8DKJ2021
25	1"	1.5/16"-12	23	41	K8DKJ2521
32	1.1/4"	1.5/16"-12	24	41	K8DKJ3221
32	1.1/4"	1.5/8"-12	26	50	K8DKJ3226
38	1.1/2"	1.7/8"-12	29	55	K8DKJ3830
50	2"	2.1/2"-12	30	70	K8DKJ5040

Referentie rvs uitvoering: vervang K door R

K84DKJ

Aansluiting	: Binnendraad met losse moer
Schroefdraad	: JIC
Afdichting	: 74° conus
Uitvoering	: 45° gebogen - monobloc

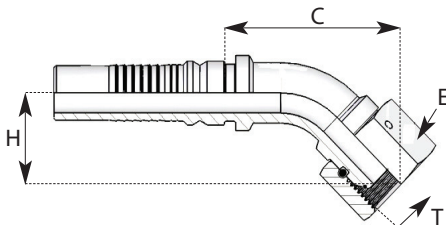


DN	Inch	T draad	C mm	E mm	H mm	Referentie
20	3/4"	1.1/16"-12	85	32	28	K84DKJ2017
20	3/4"	1.3/16"-12	85	36	31	K84DKJ2019
20	3/4"	1.5/16"-12	88	41	32	K84DKJ2021
25	1"	1.5/16"-12	113	41	36	K84DKJ2521
32	1.1/4"	1.5/8"-12	133	50	50	K84DKJ3226
38	1.1/2"	1.7/8"-12	165	55	49	K84DKJ3830
50	2"	2.1/2"-12	194	70	68	K84DKJ5040

Referentie rvs uitvoering: vervang K door R

K89DKJ

Aansluiting	: Binnendraad met losse moer
Schroefdraad	: JIC
Afdichting	: 74° conus
Uitvoering	: 90° gebogen - monobloc

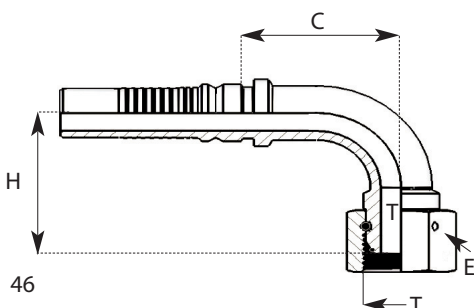

DN	Inch	T draad	C mm	E mm	H mm	Referentie
20	3/4"	1.1/16"-12	54	32	54	K89DKJ2017
20	3/4"	1.3/16"-12	54	36	57	K89DKJ2019
20	3/4"	1.5/16"-12	54	41	62	K89DKJ2021
25	1"	1.5/16"-12	77	41	66	K89DKJ2521
25	1"	1.5/8"-12	73	50	77	K89DKJ2526
32	1.1/4"	1.5/8"-12	92	50	88	K89DKJ3226
38	1.1/2"	1.7/8"-12	98	55	95	K89DKJ3830
50	2"	2.1/2"-12	121	70	134	K89DKJ5040

Referentie rvs uitvoering: vervang K door R